

OF-195P-A1

19.5" PCAP Touch Monitor




Description

The newly designed, OF-195P-A1 is a 19.5" commercial-grade open frame solution. The refined aesthetics, standard gasketed bezel and cable management feature ensure that the end application remains protected from the harshest of environments without sacrificing the ease of installation and product performance or longevity. With a stylish thin cable management bracket and its versatile design, the OF-195P-A1 is an exceptional choice for many applications within a variety of verticals. Well suited for point-of-information, point-of-service and interactive signage, the OF-195P-A1 retains the feature set to mold a unique solution and a memorable user-experience in a variety of applications.

Featured Specifications

- Size: 19.5" TFT LCD
- Maximum Resolution: 1920 x 1080
- Contrast Ratio: 3000:1
- Brightness: 250 nits (No Touch), 212 nits (P-CAP)
- View Angle: H:178°, V:178°
- Video Port: 1 x VGA, 1 x DP, 1 x HDMI
- Warranty: 3 year

Audio DC-In Port DP Port HDMI VGA USB (Type B) RJ45

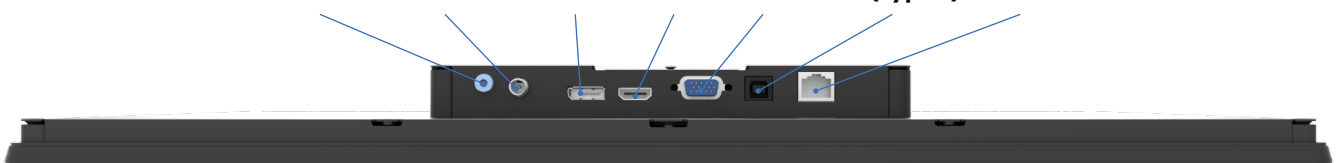

Specifications

Touch LCD Display

Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)

I/O Ports

USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x DP, 1 x HDMI
Audio Port	Line-Out
Power Input	1 x 12V DC Jack with lock

Physical Properties

Power Supply	36 W (12V, 3A) External Power Adaptor
Speaker	–
Housing Color	Black
Construction	Glass, Plastic (ABS), SECC Metal
Compliance	Front Panel IP65 Compliant
Dimensions (W x H x D) mm	479.2 x 285 x 42.05
Net Weight (kg)	4.61 Kg
Gross Weight (kg)	6.31 Kg
Carton (W x H x D) mm	585 x 387 x 158
VESA	100 x 100 mm
Ball Drop	UL60950(500g/1.3m) and IK08

Safety

Certifications	FCC, UL/CUL, CE, RoHS, REACH
----------------	------------------------------

Environment

Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing

Optional Peripheral

Remote Key	1 x RJ-45 for Remote Key
------------	--------------------------



www.MicroTouch.com | us.orders@microtouch.com

MicroTouch Interactive, Inc.
200 East Broadway Avenue, Maryville, TN 37804 | (616) 786-5353

The information presented in this specification sheet is intended as general information about MicroTouch products and is subject to change. Product specifications and warranties will be governed by MicroTouch Interactive, Inc. standard terms and conditions of sale. Products are subject to availability. Copyright © 2025 MicroTouch Interactive, Inc. All rights reserved. MT21-1064 - 032425