



DI SERIES

DI881LT2


88" 1000 Nits Bar-type Digital Signage Display



24 / 7
OPERATION




32 : 9
ASPECT RATIO



BUILT-IN
MEDIA PLAYER



FANLESS




TRUECOLOR™
CALIBRATED

SPECIFICATION

MODEL	DI881LT2	
PANEL	LCD Panel Type	87.8 inches LCD
	Native Resolution	3840 x 1080 (32 : 9)
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	1000 nits
	Color Depth	10 bits
	Contrast Ratio	3000 : 1
	Response Time (Typ.)	8 ms
	Viewing Angle (H/V)	178° / 178°
	Light Life Time (Typ.)	50,000 hrs
POWER	Blackening Defect Free	Up to 110°C (230°F)
	Panel Surface	AG Haze 1%, 3H
	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60Hz
MECHANICAL SPECS	Power On Mode (Typ./ Max)	360 W / 580 W
	Power Saving Mode	< 1 W
	Bezel Width (T/B/L/R)	5.8 / 5.8 / 4.3 / 4.3 mm
	Cabinet Color	Black
USER INTERFACE	Monitor Dimension (LxHxD)	2158.4 x 611.3 x 84.0 mm
	Monitor Weight	38.5 kg
	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	600 x 400 mm
	Carrying Handles	Yes
	Fanless Design	Yes
	Language	English
INPUT	Support SNMP (Up to V3.0)	Yes
	Image Retention Protection	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
OUTPUT	Internal Temperature Sensor	Yes
	OSD Menu Rotation	Yes
EXTERNAL CONTROL	HDMI	x2 (2160P)
	DisplayPort	x1
	USB	x1 (For Internal Player), x1 (Service Port)
	SD Slot	x1
INTERNAL PLAYER	Audio	x1
	RS-232	In x1, Out x1
	RJ-45	x1 (LAN)
	Operating System	Android 7.1.2
ENVIRONMENT	Processor	ARM Quad-Core Cortex-A17
	Clock Speed	1.6GHz
	Main Memory Interface	DDR3, 2G
	Graphics	Mali-T764 GPU
	Storage	Internal: 8GB eMMC Flash External: Support SD , Up to 32GB
	Multimedia	4K 10bits H265/H264 video decoders 1080P other video decoders (VC-1, MPEG-1/2/4, VP8) 1080P video encoder for H.264 and VP8
	Wi-Fi Specification	802.11 b/g/n 2412.0MHz - 2462.0MHz
CERTIFICATION	Operating Temperature	0° C ~ 40° C
	Storage Temperature	-20° C ~ 60° C
	Humidity	10% ~ 80% RH Non-condensing

DIMENSIONS

Unit: mm [inch]

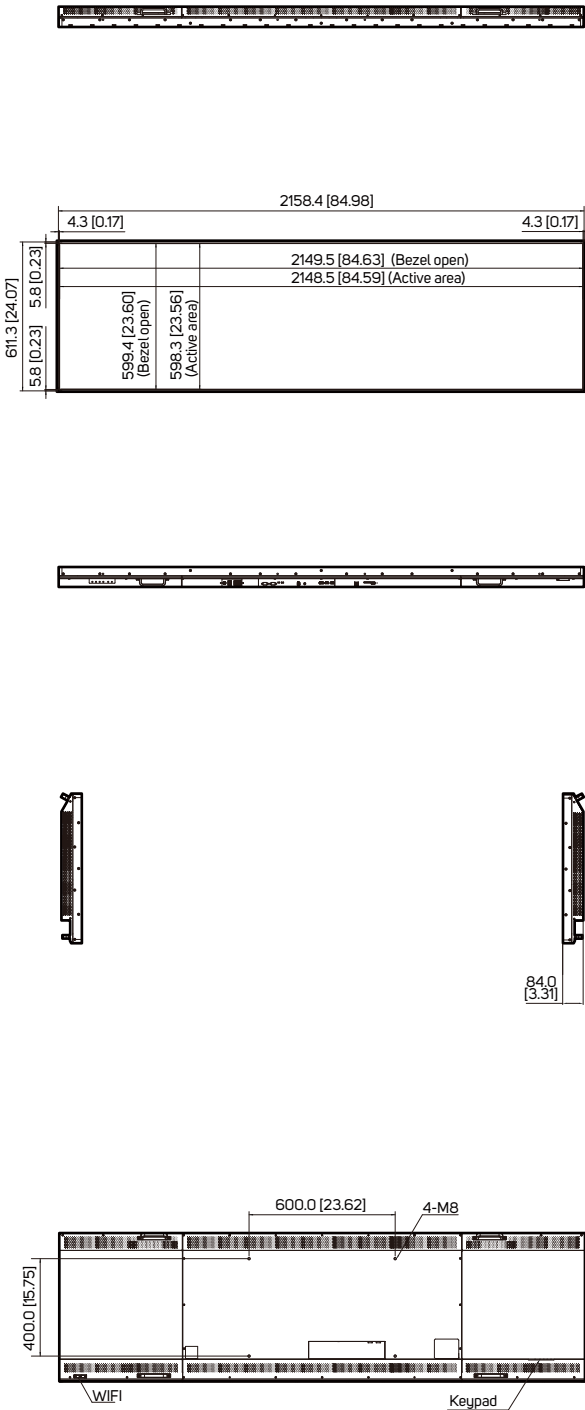

INTERFACE

